



Drench-Mate®

Stall-Mate

Blade Installation


- 1 Metal Blade in Front
- 2 Metal Blades in Back
- Green Rubber Flapper in Between

- Replace Blue Metal Piece
- Insert Bolt, Washer & Nut



9 Metal Blades & 3 Rubber Flappers on Each Unit

Test after blade installation!!

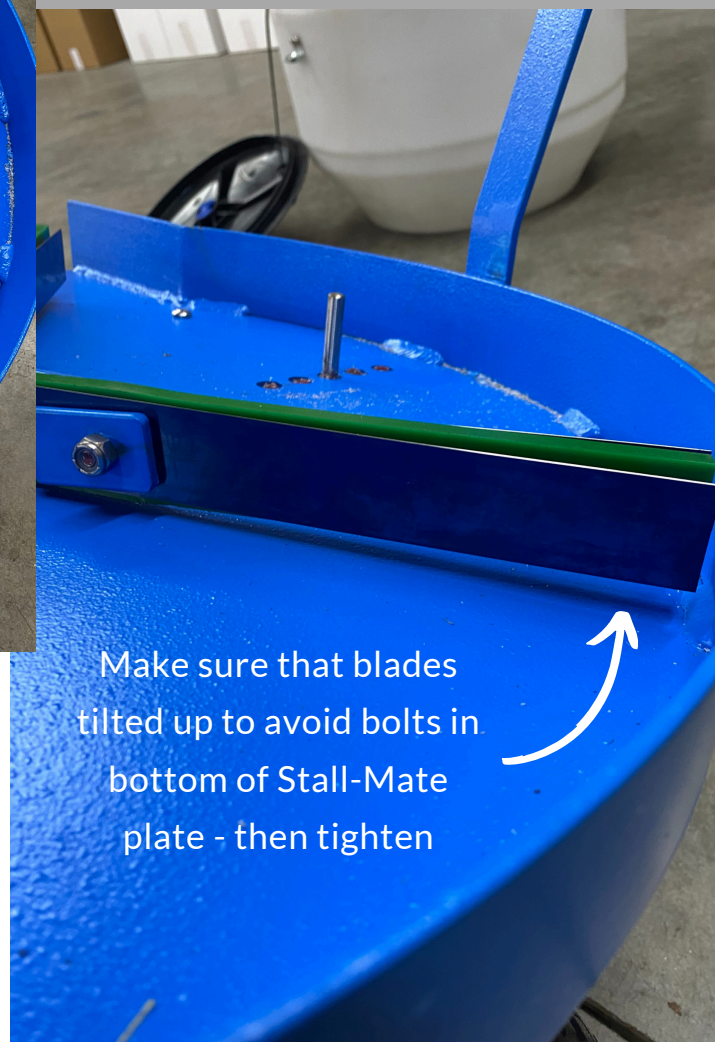

Make sure that blades tilted up to avoid bolts in bottom of Stall-Mate plate - then tighten